UFO series specifications

www.centurysunshine.com

Product Details

Switch

PC transparent
lamp shade

Light pole

USA Bridgelux LED

Taiwan Epistar LED
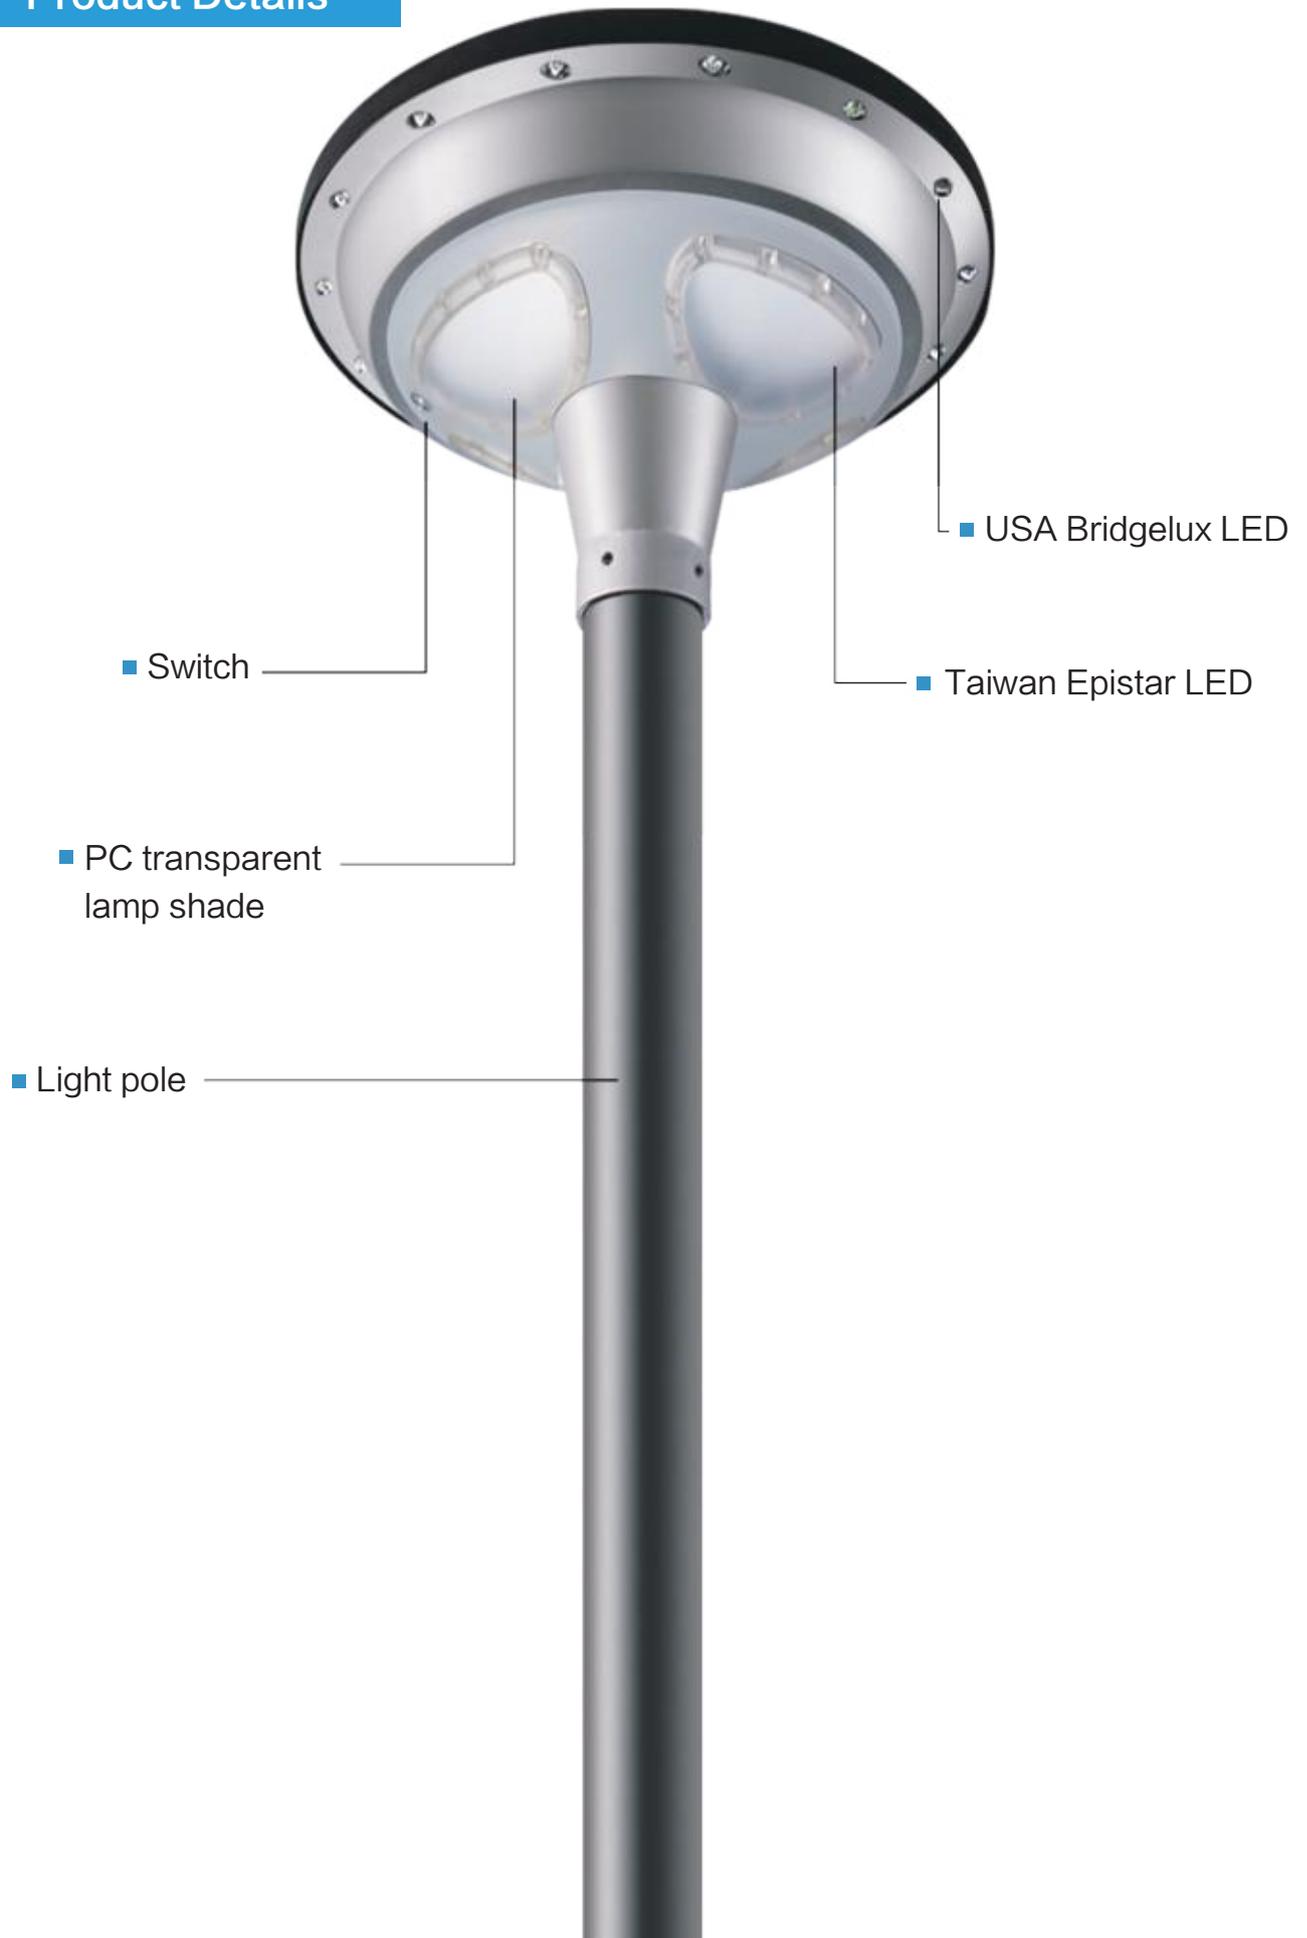
Product Feature

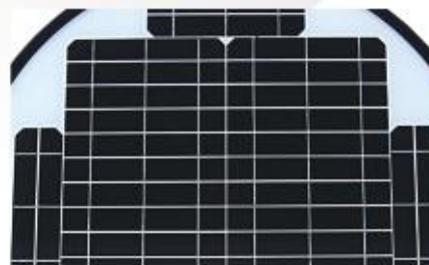
PC transparent lamp shade

15 pieces USA Bridgelux LED

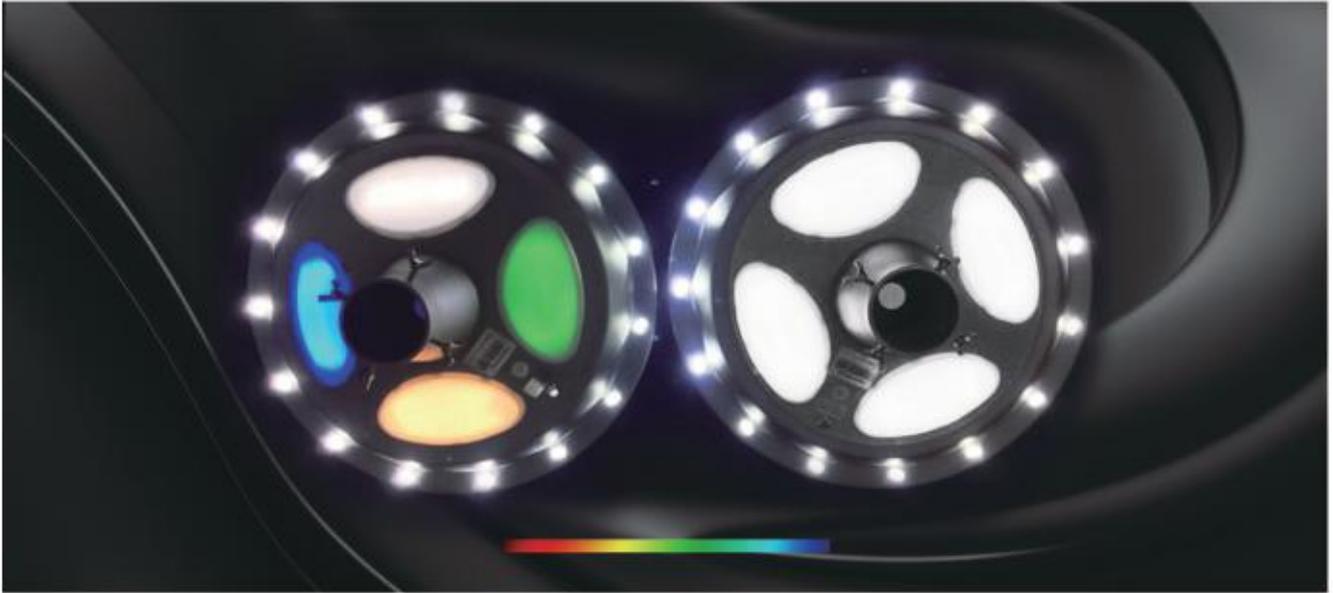
independent private mold appearance

stainless steel switch
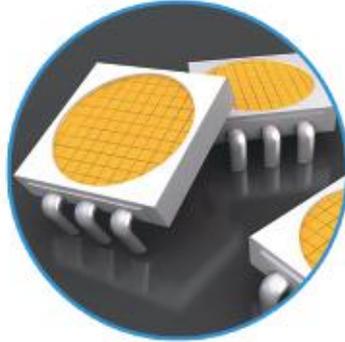

polycrystalline solar panel

Product Feature

- Cold white
- warm white
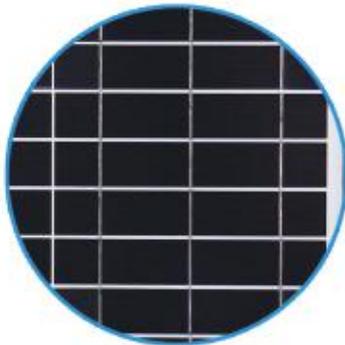- gradual change color
- rainbow color
- running horse lamp color

IP65
Waterproof Grade

Waterproof   electricity and dust proof

Materials Introduction:

LED energy-saving light source:

imported USA Bridgelux LED, super high light efficiency, long-lasting lighting

Solar panel:

high-efficiency solar panel, high conversion rate, special surface treatment

Aluminum alloy material：

using light and smooth aluminum alloy reinforcement shell, overall strong and durable, surface adopts special paint treatment, high sense of atmosphere.

Product Advantages

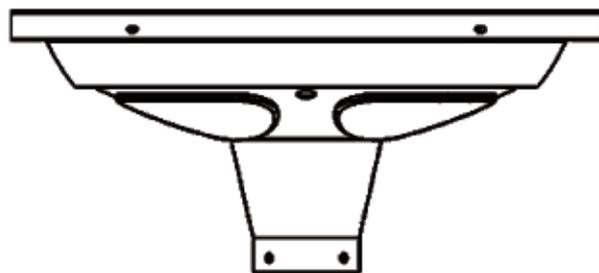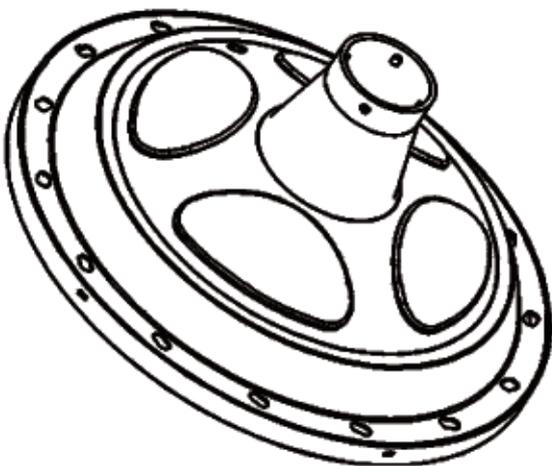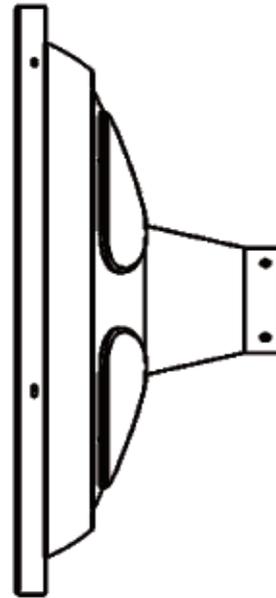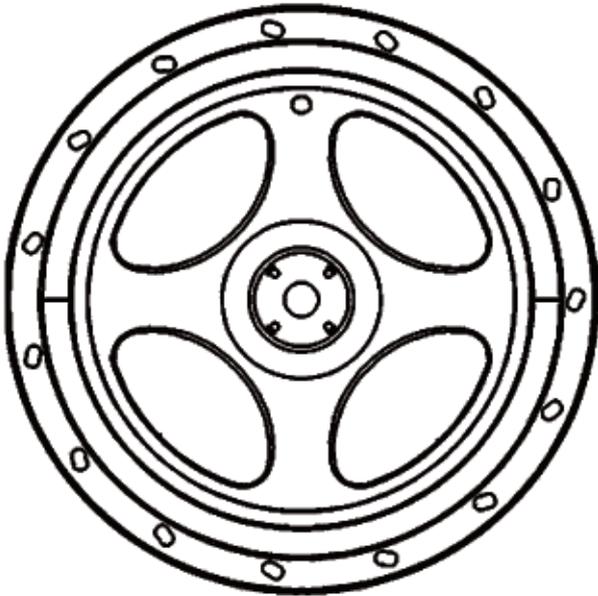| Easy to install and maintain | Multiple control modes for easy operation | Long life span of LED chip | Customized battery box, waterproof and high temperature resistant; | Solar panel, high conversion rate | Intelligent turn-on lighting mode |

Product Size:

Installation Procedure:

1.Choose the best position for lighting.

2.Open the package and check if the accessories are complete.

3.Use the ejector pin to open the switch before installation

■ Switch
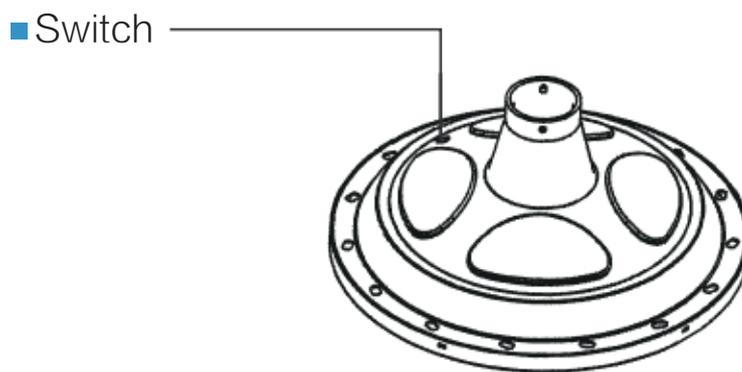
4.Firstly, fix the base to the lifting device with screws, then put the solar panel of the lamp body up, insert the lamp into the pole with the base facing down, and tighten the screws. (As figure 1)

Switch

Pedestal

M4 screw   Pedestal   lamp body

M8 screw

Light pole
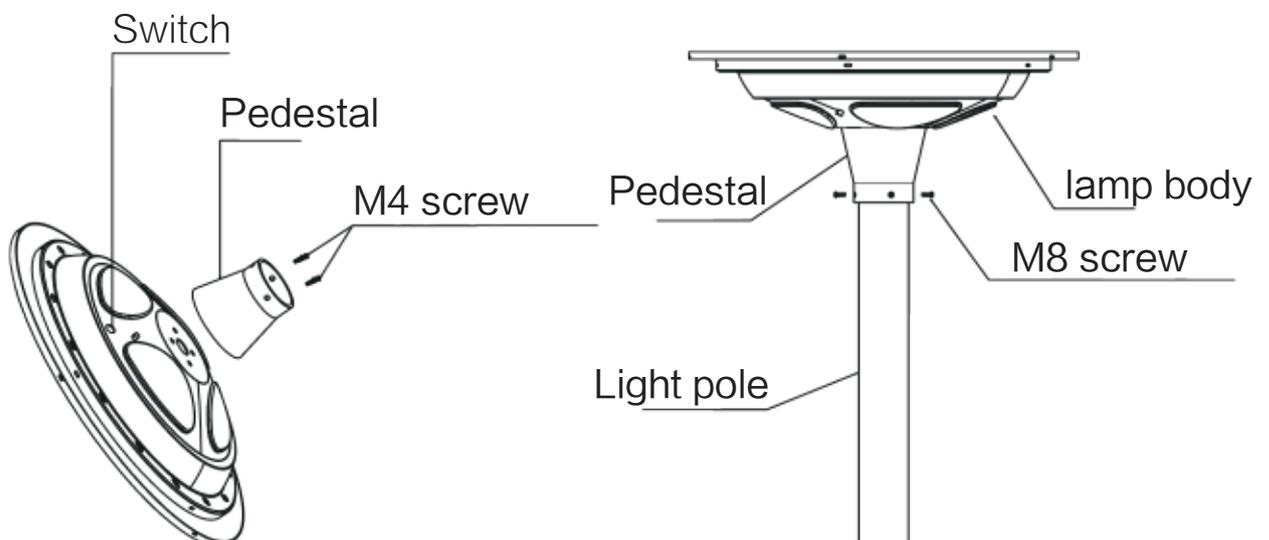
As figure 1

Warm prompt:

During installation, one or two people shall hold the lamp body, and another person shall tighten the nut, so as to avoid misplacement of the nut due to force during the tightening process, or would result in nut sticking and subsequent undisassembly;

It is recommended to install on a sunny day, because it can't be charged quickly after installation in rainy days, and it will be discharged at night, which will affect the using effect.

If the lamp does not work after the package is opened, it is usually because the battery power is insufficient. Charge it for 2 days before installation.

Note 1

Note 2

Poor charging

Best charging
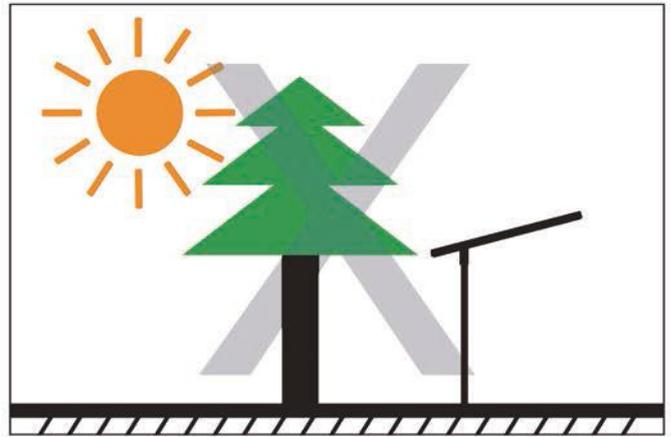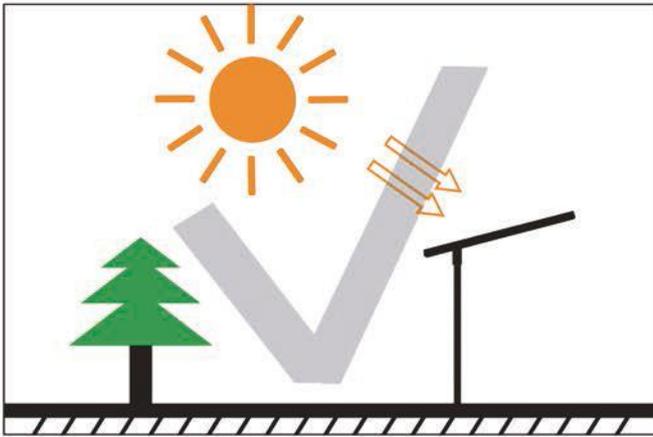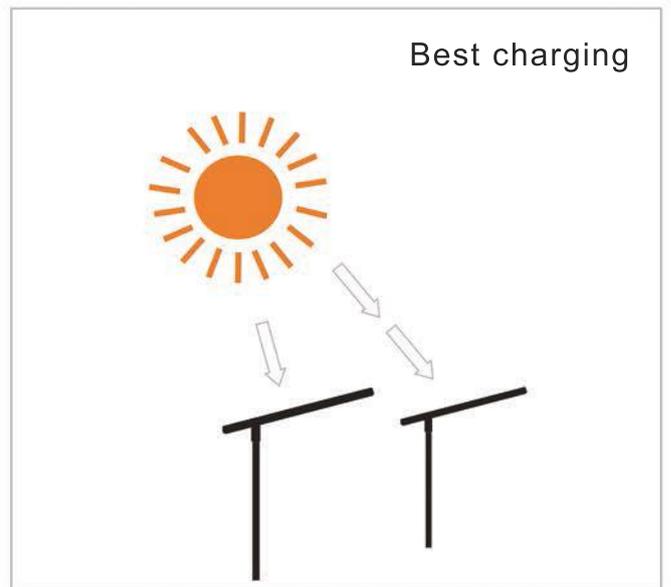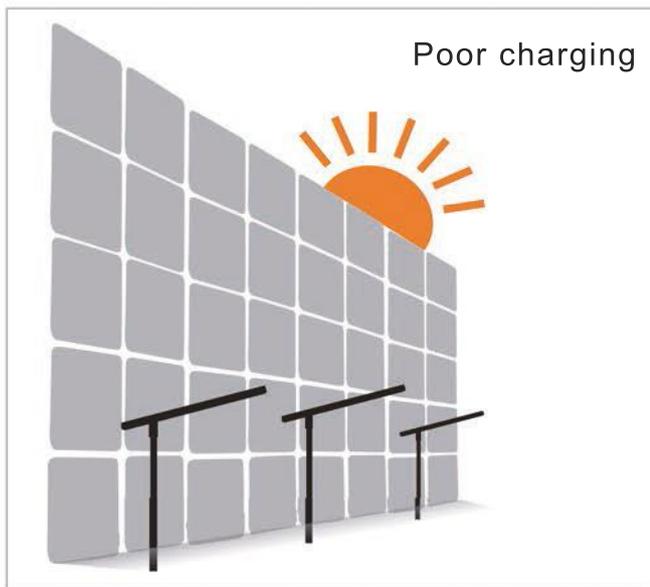
■ Please choose a place that is sunny and fully exposed, then install integrated solar street lights.

■ And note that the solar panels must be unobstructed and must be exposed to the sun.

Case shows:

| Road | Mountains | Rural | Street | Square | Park | School |

Shenzhen Century sunshine Lighting Limited

Certificate:

CE

IP66

RoHS

Coatact us:

+86-0755-29360050

andy@centurysunshine.com

6-7F, 1#, B Area, Xifa Industrial Park, Yintian Industrial Zone, Xixiang, Bao'an, Shenzhen, Guangdong Province